


Unisto Metalo 15



Security
Logistics
Identification
Control

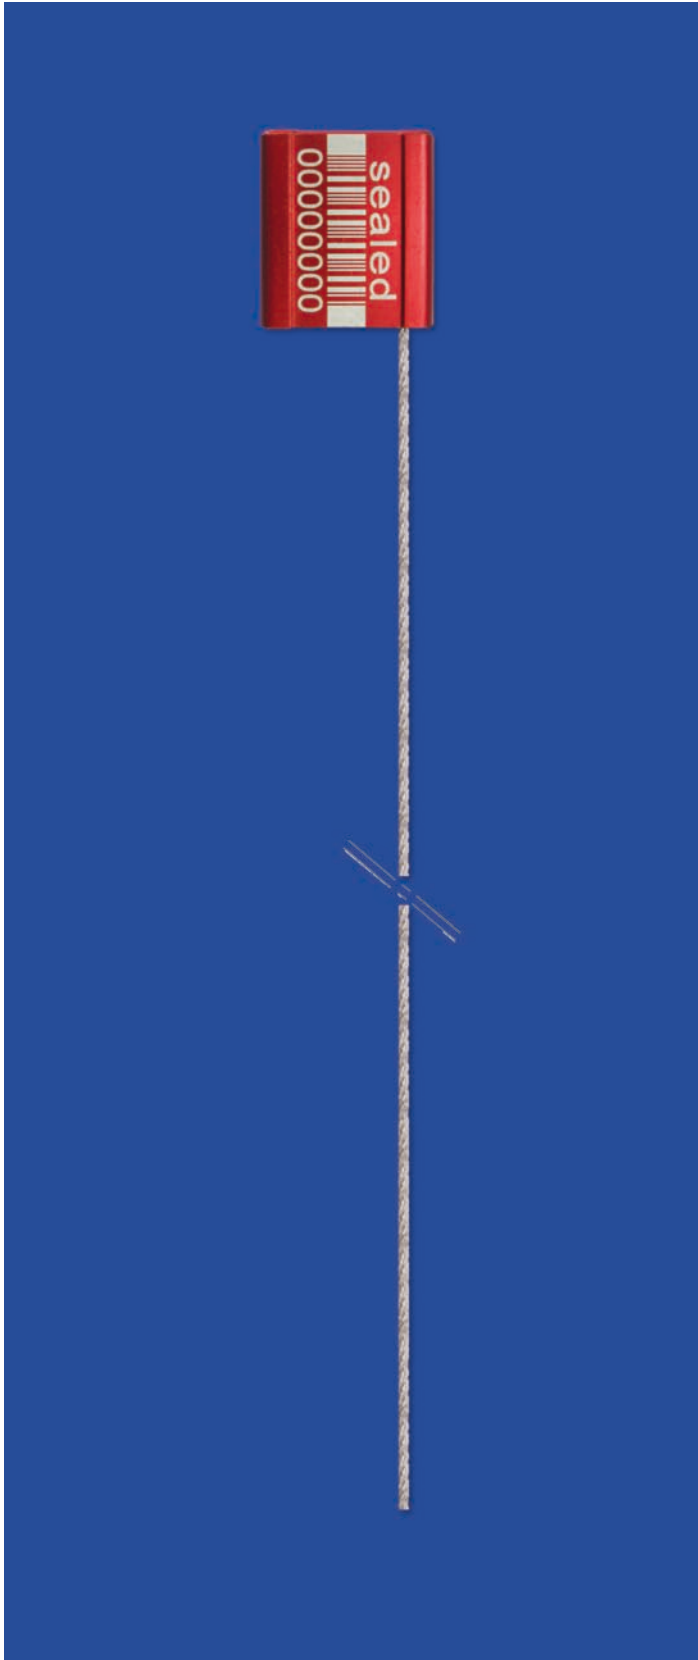

Unisto Metalo 15



Destructive Tests (ISO/IEC PAS 17712)

Tensile: Above 3.0 kN
Shear: Below 227 kg-f
Bend: Above 501 Cycles (Flexible Seal)
Impact (low temperature):
 Below 27.12 J
Impact (high temperature):
 Below 27.12 J

Identifications Outer Casing

Specification: Laser Marked or Engraved
Logo/Abbreviations: Alphabets or 2 dimensional graphic
Serial Numbers: Max. 7 digits Alphanumeric or Barcode

Material

Seal Casing (Outer Casing and Inner Insert):
 Aluminium Alloy
Cable: Non-Preformed 7x7 Galvanised
 Air Craft Cable
Locking Mechanism (Inter-locking Roller):
 Heat-treated Carbon Steel
Locking Mechanism (Tension Spring):
 Heat-treated High Tensile Steel

Packaging

Packing: 10 sequentially Seals
 bundled with Rubber Band
 100 sequentially Bundles per Carton
Quantity: 1'000 Seals per Carton
Carton Dimensions: L 480 mm x W 260 mm x H 160 mm
Carton Weight: Approximate 10,14 kg

Dimensions

Seal Casing (Outer Casing):
 L 23.0 mm x W 21.0 mm x T 7.0 mm
Seal Casing (Inner Insert):
 L 23.0 mm x W 11.5 mm x T 3.2 mm
Cable: OD 1.5 mm x L 200 mm
 (Standard length)
Locking Mechanism (Inter-locking Roller):
 OD 7.2 mm x T 1.8 mm
Locking Mechanism (Tension Spring):
 OD 2.2 mm x L 8.0 mm x 9 Coils

Others

Colours: Blue, Green, Orange, Yellow, Red, White
 (Special Colours on request)